# Model: TC-300-LRO





#### **Features**

- ★ Water quantity 300L/h
- ★ Automatic operation with panel display & control
- **★** Simple maintenance
- ★ Cost effected for business

### **Application**

**Chemical analysis water** 

**Humidifying water** 

Washing water

**Rinsing water** 

**Drinkable water** 

**Ultra-pure water** 



Cleaning water for chiller scale



Humidifying water for air conditioner




Cleaning water for film production



Medical & milk Formulated water

#### **Manufacturing Process**

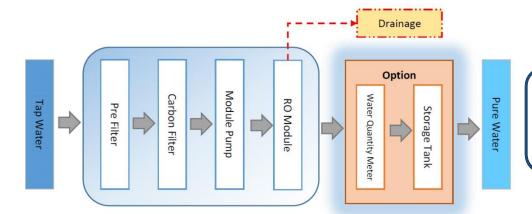


90∼99% of inorganic & organic substance, micro organic of raw water is efficiently eliminated.

## Specifications


Model	TC-300-LRO
Water quantity	Temperature of water 25°C 300 ( L / hr )
	Temperature of water 10°C 165 ( L / hr )
Elimination efficiency	90~99 (%)
External dimensions	W600 × D500 × H1150 (mm)
Function	Water supply pressure alarm
	Water leakage alarm
	External alarm output
	Water quality display lamp
	Automatic fanction of initial drainage
R.O. module	2 module
Pre-filter	20 inch wind filter × 1
	20 inch carbon filter × 1
Production	Rc 1/2
Supply / Drain outlet	
Power supply voltage	AC200V 50/60Hz 5A

### ■ Measurement (mm)

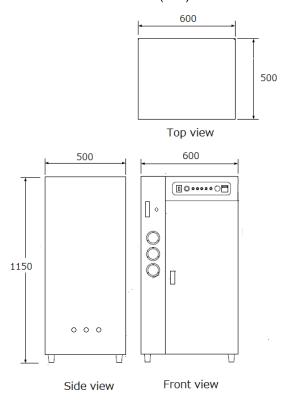

# Option and Accessories

We provide required accessories for the system based on usage and quantity.

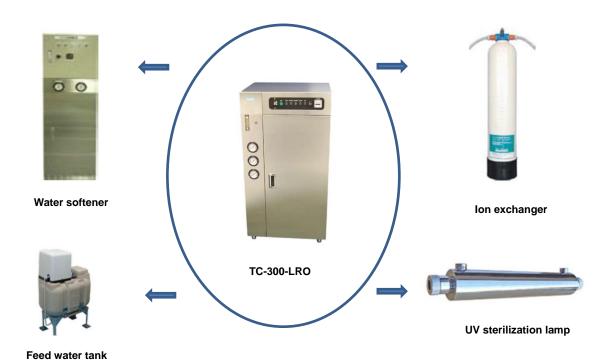

T&C Technical Co., Ltd

Head Office: 40-12 Senju-Nakacho Adachi-ku Tokyo 120-0036 Japan

http://www.tactec.co.jp/english/index.html

